


## » COMe-cDC2 «



**COM**  **Express**®

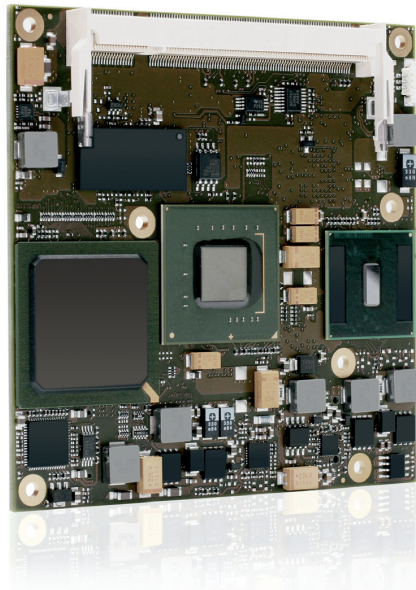

**C**  **US**

### Small economic Intel® Atom™ solution

- » Intel® Atom™ N270 processor in 45 nm with Hyperthreading
- » COM Express® compact (95x95mm), with Pin-out Type 2
- » Fanless use and Economic Power Off S5 Eco
- » Replacement for ETXexpress®-PM and microETXexpress®-PM

## COMe-cDC2

### Small economic Intel® Atom™ solution

Equipped with Intel® Atom™ technology N270, the COMe-cDC2 is not only a cost-efficient solution but also energy-saving. With the innovative power state S5 Eco, the module has a soft-off power mode with a consumption of

less than 1 mA. Compared to the regular S5, the power consumption is cut down by factor 200 at least.

#### Technical Information

<b>Processor</b>	Intel® Atom™ N270 with 1.6 GHz
<b>Cache</b>	512 kB L2 Cache
<b>Chipset</b>	Intel® 945GSE, Intel® ICH7M
<b>Memory</b>	Up to 2 GB DDR2 (400/533) SODIMM
<b>Hard Disk</b>	2x SerialATA (AHCI), 1x PATA, optional SSD flash onboard
<b>USB</b>	8x USB 2.0
<b>PCI</b>	PCI 2.3, 32 bit / 33 MHz
<b>PCI Express®</b>	3 PCI Express® x1
<b>Ethernet</b>	10/100/1000 MBit Ethernet, Intel® 82574L
<b>Sound</b>	Intel® High Definition Audio, AC97
<b>Graphics Controller</b>	Integrated with Intel® Graphics Media Accelerator (GMA950, DirectX® 9, PS 2.0) Up to 224 MByte DVMT 3.0, Dual Independent Display support
<b>Display Interfaces</b>	Dual Channel LVDS 18 bit LVDS up to UXGA (1600 x 1200), CRT up to QXGA (2048x1536), SDVO, TVout
<b>Operating Systems</b>	Windows Vista®, Windows® XP, Windows® XP Embedded, Windows® CE, Linux, QNX, VxWorks and others
<b>Security Features</b>	TPM 1.2 onboard
<b>Other Features</b>	ACPI with S5 Eco, K-station and JIDA support, WakeOnLAN, Staged Watchdog, RTC, LPC, JRC support, Fast I²C, SMBus
<b>Form Factor</b>	COM Express® compact: 95 x 95mm Pin-out Type 2
<b>Power Consumption</b>	Typ. Idle ~ 8 W, Economic Power-Off S5 Eco < 1 mA 8.5 V – 18 V Wide Range Power Supply
<b>Temperature (*)</b>	Operation: 0°C to 60°C Storage: -30°C to 85°C
<b>Humidity</b>	Operation: 10% to 90% Storage: 5% to 95% (non condensing)
<b>Shock and Vibration</b>	IEC 60068-2-27 and IEC 60068-2-6

#### Ordering Information

Article	Part No.	Description
<b>COMe-cDC2</b>	36005-0000-16-2	COM Express® compact pin-out type 2 Computer-on-Module with Intel® Atom™ N270 1.60GHz, 945GSE chipset, ICH7M, 1x DDR2 SODIMM socket
<b>HSP-COMe-cDC2 threaded</b>	36005-0000-99-0	Heatspreader for COMe-cDC2, threaded mounting holes
<b>HSP-COMe-cDC2 through</b>	36005-0000-99-1	Heatspreader for COMe-cDC2, through holes
<b>HSK-COMe-cDC2 active</b>	36005-0000-99-0C01	Active cooling solution for COMe-cDC2, threaded mounting holes
<b>HSK-COMe-cDC2 passive</b>	36005-0000-99-0C02	Passive cooling solution for COMe-cDC2, threaded mounting holes

#### CORPORATE OFFICES

##### Europe, Middle East & Africa

Lise-Meitner-Str. 3-5  
86156 Augsburg  
Germany

Tel.: +49 (0) 821 4086-0  
Fax: +49 (0) 821 4086 111  
sales@kontron.com

##### North America

14118 Stowe Drive  
Poway, CA 92064-7147  
USA

Tel.: +1 888 294 4558  
Fax: +1 858 677 0898  
info@us.kontron.com

##### Asia Pacific

17 Building, Block #1, ABP.  
188 Southern West 4th Ring Road  
Beijing 100070, P.R.China

Tel.: +86 10 63751188  
Fax: +86 10 83682438  
info@kontron.cn