
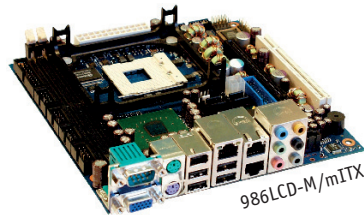
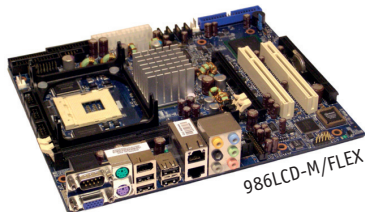
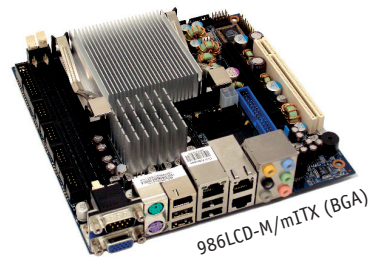


» 986LCD-M Family «

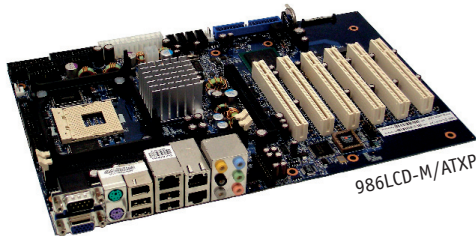

Intel® 945GM + Intel® ICH7R Embedded Chipset, Intel® Core™2 Duo mobile processor support

- » Long-term availability
- » Intel® GMA950 Controller with PCI-Express x16/SDVO interface
- » Flat Panel Display Support, incl. dual independent display
- » Up to 3x 10/100/1000 Mbps Ethernet
- » HD Audio, Serial ATA w. Raid 0/1/5/10
- » 2x IEEE 1394, 8x USB 2.0, 4x Serial port

Technical Information

Processor	Intel® Celeron® M, Intel® Core™ Solo, Intel® Core™ Duo & Intel® Core™2 Duo Processors (mPGA478); Prepared for mBGA479
Chipset	Intel® 945GM and Intel® ICH7R Embedded Chipset
Front Side Bus	Front Side Bus 533 / 667 MHz
Bus	Up to 6x PCI 1x PCI Express® x16 / SDVO for external graphics card or ADD2 cards 1x PCI Express® x4 in 16x slot (FLEX & ATX)
DRAM	2x DDR2 socket (240pins DIMM) up to 3 GByte
Graphics	Intel® GMA950 Controller with 2D/3D Graphics Engine Dual Pipe for dual independent displays (incl. 2x LCD) HW assisted DVD/MPEG2 Decoding
Graphic Interfaces	On board CRT, on board Dual Channel LVDS, PCI-Express x 16/SDVO, Optional SVideo(TV)
HDD	4x Serial ATA150/300 and 1x ATA100 (2.54 mm connector)
Firewire	2x IEEE 1394 (1x Internal and 1x External)
Parallel/Serail Port	Bi-directional Centronics, shared floppy drive option (internal pin connector), 4x RS232C serial ports with FIFO
USB	8x USB 2.0 (4x internal and 4x external)
Ethernet	Up to 3x 10/100/1000 Mbps Ethernet Controller, Realtek RTL8111B
Keyboard/Mouse	Standard PS/2 mouse and keyboard (internal connection available)
Sound	HD Audio compliant
Hardware Monitoring	Temperature, fan and voltages
Monitoring API/DMI	Software interface to monitor hardware values including HDD S.M.A.R.T.
Battery	On board Lithium battery and external battery input
Power Supply	ATX
Operating Temp.	0°C to 60°C*
EMC/ESD compliance	Compliance with EN55022 and EN61000-4-2(ESD)
Safety compliance	UL609501-1: 2003, First edition CSA C22.2 No.60950-1-03 First edition, April 1. 2003
Environmental compliance	RoHS and Lead-free production
Dimensions	Mini-ITX, 170 mm x 170 mm (6.7" x 6.7") FLEX-ATX, 190,5 mm x 228,6 mm (7.5" x 9") ATX, 304,8 mm x 190,5 mm (12.0" x 7.5")

Ordering Information

Article	Part No.	Description
986LCD-M/mITX	810200-4500	1x PCI, 3x 10/100/1000 LAN, 1x Mini PCI Express®, CF
986LCD-M/mITX	810204-4500	1x PCI, 3x 10/100/1000 LAN, 1x Mini PCI Express®
986LCD-M/mITX (BGA)	810203-4500	1x PCI, CF, 3x 10/100/1000 LAN, ULV 1.06 GHz (BGA), CF
986LCD-M/mITX (BGA)	810201-4500	1x PCI, 3x 10/100/1000 LAN, LV 1.66 GHz (BGA)
986LCD-M/FLEX	810210-4500	2x PCI, 2x 10/100/1000 LAN
986LCD-M/ATXP	810220-4500	6x PCI, 3x 10/100/1000 LAN, 1x Mini PCI Express®
986LCD-M/ATXE	810230-4500	5x PCI, 2x 10/100/1000 LAN

CORPORATE OFFICES

Europe, Middle East & Africa

Lise-Meitner-Str. 3-5
86156 Augsburg
Germany

Tel.: +49 (0) 821 4086-0
Fax: +49 (0) 821 4086 111
sales@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA

Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building,Block #1, ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China

Tel.: +86 10 63751188
Fax: +86 10 83682438
info@kontron.cn